


Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min,300V DC/10ms.

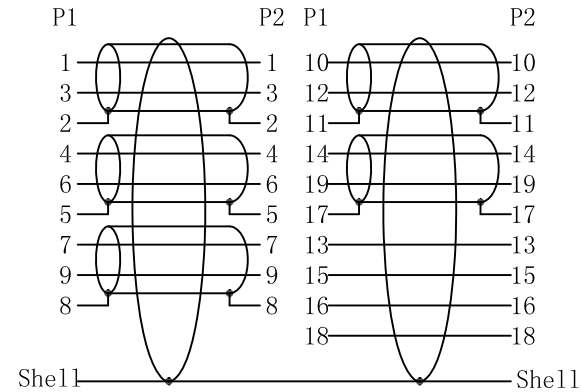

8	PE~Transparent~Low density	8	G									
7	HDMI2.1 Clip~30+30AWG~PA66+30%G/F,UL 94V-0	2	pcs		TOLERANCE			TITLE: 8K 27G HDMI Cable M TO M~30AWG~L=0.5M	CUSTOMER NO. : 11. 99. 5900			
6	HDMI AM~PH:1.25mm~Shell~OD:7.0mm~L=23mm	2	pcs		INCHES	M/M						
5	Copper~25u~W=5MM	0.08	m		.X	.015				.30		
4	HDMI~M~PVC~Dust Cap	2	pcs	.XX	.010	.10	SCALE NONE	DRAWING NO. :	REV. AO			
3	PVC~45P~Black	20	g	.XXX	.005	.05				UNIT MM	DATE 2022.09.27	1/1
2	HDMI AM 19P F4~Connector~Gold Plated	2	PCS	DRAWN BY	CHECK BY	APPD BY						
1	HDMI2.1~[30AWG(1/0.26TC)+EAM]*5P+30AWG(1/0.254TC)*4C+AEB(16/8/0.12AL 85%AL)~OD:6.0MM~BLACK Print: High Speed HDMI 7680*4320P 8K60Hz	0.52	m									
NO	DESCRIPTION	Q'TY	UNIT									