

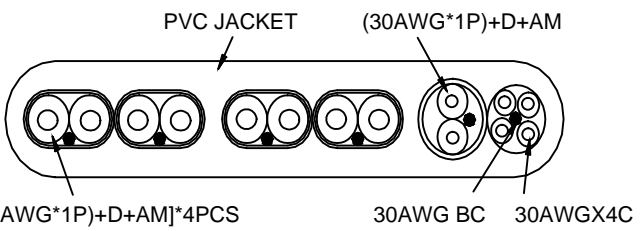


CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A		2022/11/25	

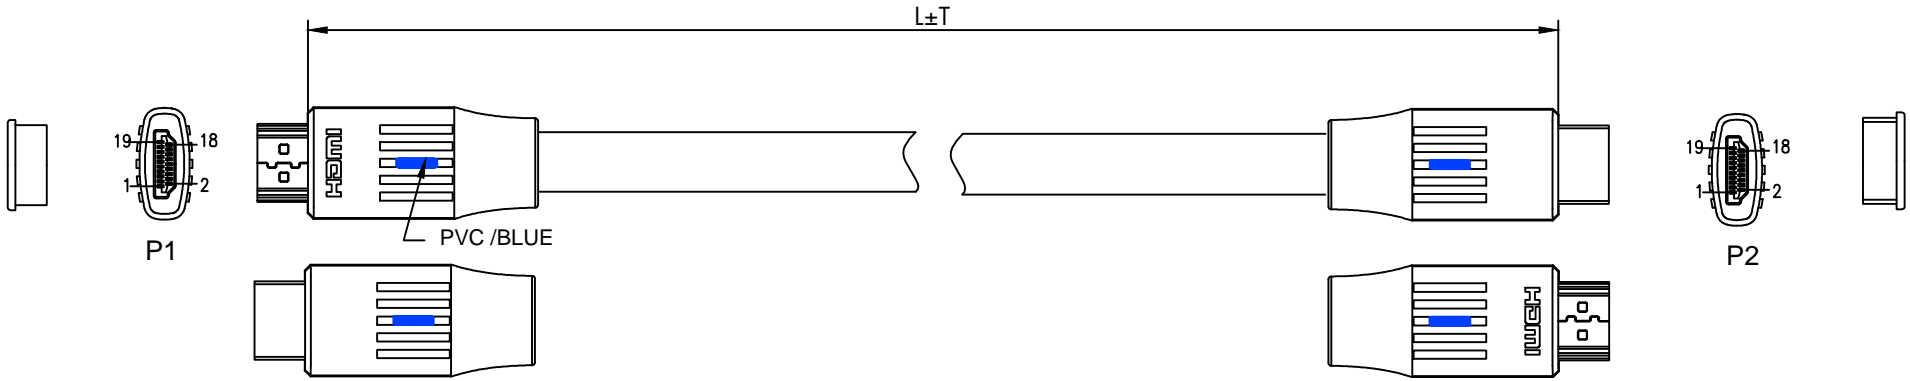

PIN OUT

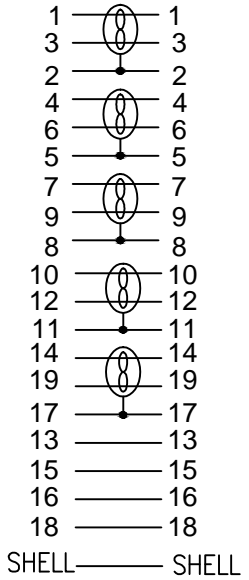

NOTE:
 1. Electronic test
 1.1 Open/short 100% test
 2. Tested by TOATLPHASE Advanced Cable Tester 2 for HDMI2.1(48G)
 Support 7680*4320 30Hz 4:4:4
 Support 7680*4320 60Hz DSC
 4. Tested :4k*2K@120HZ Pass
 RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

ITEM NO.	LENGTH
11.99.5905	1000±20
11.99.5906	2000±20
11.99.5907	3000±30

NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS
⑤	DUST COVER	TRANSPARENT PE	1	
④	OUTER MOLD	PVC/BLACK	1	
③	HDMI MALE	HDMI A MALE, BLACK INSULATION, GOLD PLATED PIN, NICKEL PLATED SHELL	1	
②	HDMI MALE	HDMI A MALE, BLACK INSULATION, GOLD PLATED PIN, NICKEL PLATED SHELL	1	
①	CABLE	(28AWG/1 BC*2C+E+AM+HM)*4F+(30AWG/1 BC*1P+E+AM+M)*1F+(30AWG/1 BC)*4C +E+Jacket:PVC /black ,OD2.3*13mm	1	

NAME	VALUE UHD HDMI Cable, Flat, M/M, 8K60Hz/4K120Hz		
Item no.	See the chart		
SECOMP	MAPE	TOLERANCE	
		X.	±1.00
		X.X	±0.50
DRAW BY	SCALE	MM	
	PAGE	1/1	