


NOTE:

1. Display port 2.1 Mode
2. Supports bandwidth up to 54Gbps
3. $10240 \times 4320 @ 60\text{Hz}$ with DSC, $7680 \times 4320 @ 60\text{Hz}$
4. $3840 \times 2160 @ 120\text{Hz}$, 4:4:4 8bit, $3840 \times 2160 @ 144\text{Hz}$, 4:4:4
5. Supports 3D/HDCP2.2/DPCP1.0/EDID/HDR10
6. Support multi-streaming
7. Operation temperature : $0^\circ\text{C} \sim +50^\circ\text{C}$
8. Storage temperature : $-20^\circ\text{C} \sim +70^\circ\text{C}$
9. RoHS and REACH Compliant

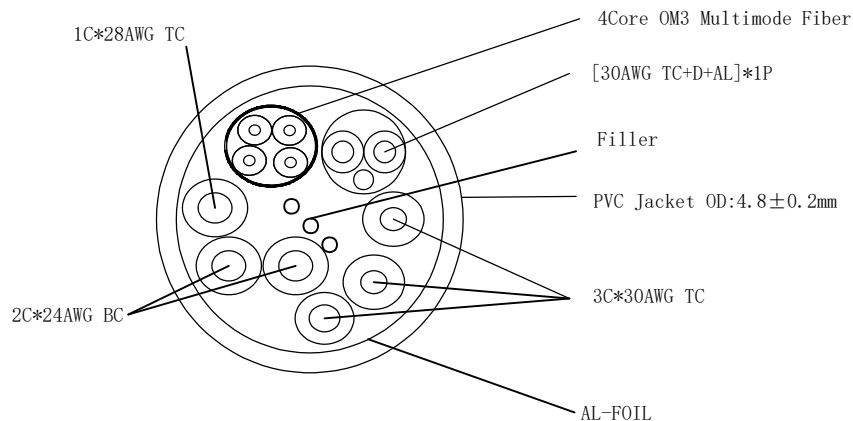

MATERIAL LIST:

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
④	Moulding	BLACK PVC	2	
③	Housing	Zinc Alloy Black	2	
②	Connector	DP 20P/M WITH LATCHING SOLDER TYPE, BLACK INSULATION, THE PIN GOLD PLATED , THE SHELL FOR Gold PLATED	2	
①	Cable	4*OM3+30AWG TC*3C+24AWG BC*2C+28AWG TC*1C+(30AWG TC+D+AL)*1P+AL+fiber PVC OD: $4.8 \pm 0.2 \text{mm}$ black	L ± T	
		NEW	2024-07-31	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

14. 01. 3504	ROLINE DisplayPort DP80 UHBR13.5 54GB AOC Cable L:50m
14. 01. 3503	ROLINE DisplayPort DP80 UHBR13.5 54GB AOC Cable L:30m
14. 01. 3502	ROLINE DisplayPort DP80 UHBR13.5 54GB AOC Cable L:20m
14. 01. 3501	ROLINE DisplayPort DP80 UHBR13.5 54GB AOC Cable L:15m
ITEM NO.	DESC.

SECOMP