


## 26-Port Hardened Industrial Gigabit PoE+ DIN-Rail Switch

TI-PG262 (v1.0R)

- 16 x Gigabit PoE+ ports
- 8 x Gigabit ports
- 2 x 100/1000Mbps SFP ports
- Up to a 480 watt full PoE+ power budget
- 52Gbps switching capacity
- Hardened IP30 rated metal switch
- Includes DIN-Rail and wall mounts
- Extreme -40 to 75 °C (-40 to 167 °F) operating temperature range
- Redundant power inputs with overload current protection
- Alarm output triggered by power failure
- Powers supply sold separately (Model TI-S48048)
- Lifetime Warranty
- NDAA / TAA compliant

TRENDnet's Industrial Gigabit PoE+ DIN-Rail Switches feature a rugged IP30 rated metal enclosure. These Industrial Unmanaged PoE+ Switches are designed to withstand a high degree of vibration and shock, while operating in both high and low temperatures for industrial environments within -40° – 75° C (-40° – 167° F). Redundant power inputs with overload current protection on each industrial unmanaged PoE+ switch minimizes network downtime.

Installers and integrators can save on equipment costs and reduce installation time with TRENDnet's Industrial Gigabit PoE+ Switches by delivering up to 30W per port of PoE power and data over existing Ethernet cables. With PoE technology, users only need one set of cables to deliver both data and power from the industrial unmanaged PoE+ switch. With these industrial unmanaged PoE+ switches, easily network PoE devices, such as high-power wireless access points, PTZ and other advanced IP cameras, VoIP phone systems, IPTV decoders, access controls, and more.

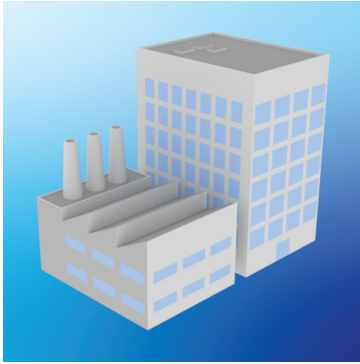


### Industrial Applications

Networks devices for manufacturing, general industrial, warehousing, surveillance, and corporate applications.



### PoE+ Power

Provides full PoE+ (30 watts) per port for devices such as access points, cameras, access control equipment, and more.

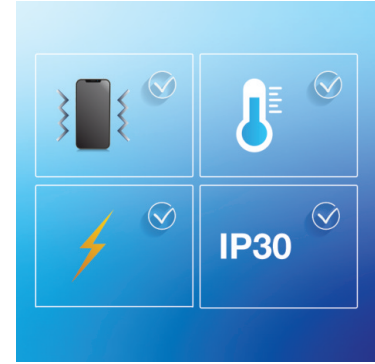

### Extreme Environments

Hardened IP30 switch, with a -40 to 75 °C (-40 to 167 °F) operating temperature range, functions in most environments.

## FEATURES



#### Full PoE+ Power Budget

Supplies up to 30W of PoE/PoE+ power per port (802.3at/802.3af) with an up to 480W PoE power budget



#### Network Ports

The 24-port DIN-Rail Ethernet switch with SFP ports features 16 x Gigabit PoE+ ports, 8 x Gigabit ports, and 2 x 100/1000Mbps SFP ports



#### DIN-Rail/Wall Mounts

The 24-Port DIN-Rail Ethernet Switch with SFP ports features a IP30 rated metal enclosure with included DIN-Rail and wall mount hardware



#### Switching Capacity

The 24-port industrial PoE+ switch with SFP ports features a 52Gbps switching capacity



#### Redundant Power

Redundant power inputs with overload current protection (power supply sold separately, model: TI-S48048)



#### Alarm Output

Alarm output triggered by power failure of primary and/or redundant power



#### Jumbo Frame

Sends larger packets, or Jumbo Frames (up to 9KB), for increased performance



#### Extreme Temperatures

This hardened 24-port rugged PoE+ switch with SFP ports is rated for an operating temperature range of -40 to 75 °C (-40 to 167 °F)



#### Electro Magnetic Compliance

Complies with FCC Part 15 Subpart B Class A and CE EN 55032 Class A standards



#### Certifications

Rated for information technology (ITE) and industrial equipment (EN55032/35)





#### Shock and Vibration Resistant

Rated for shock (IEC 60068-2-27), freefall (IEC 60068-2-31), and vibration (IEC 60068-2-6)



#### Grounding Point

Grounding point on the 24-Port DIN-Rail Ethernet switch with SFP ports protects equipment from external electrical surges

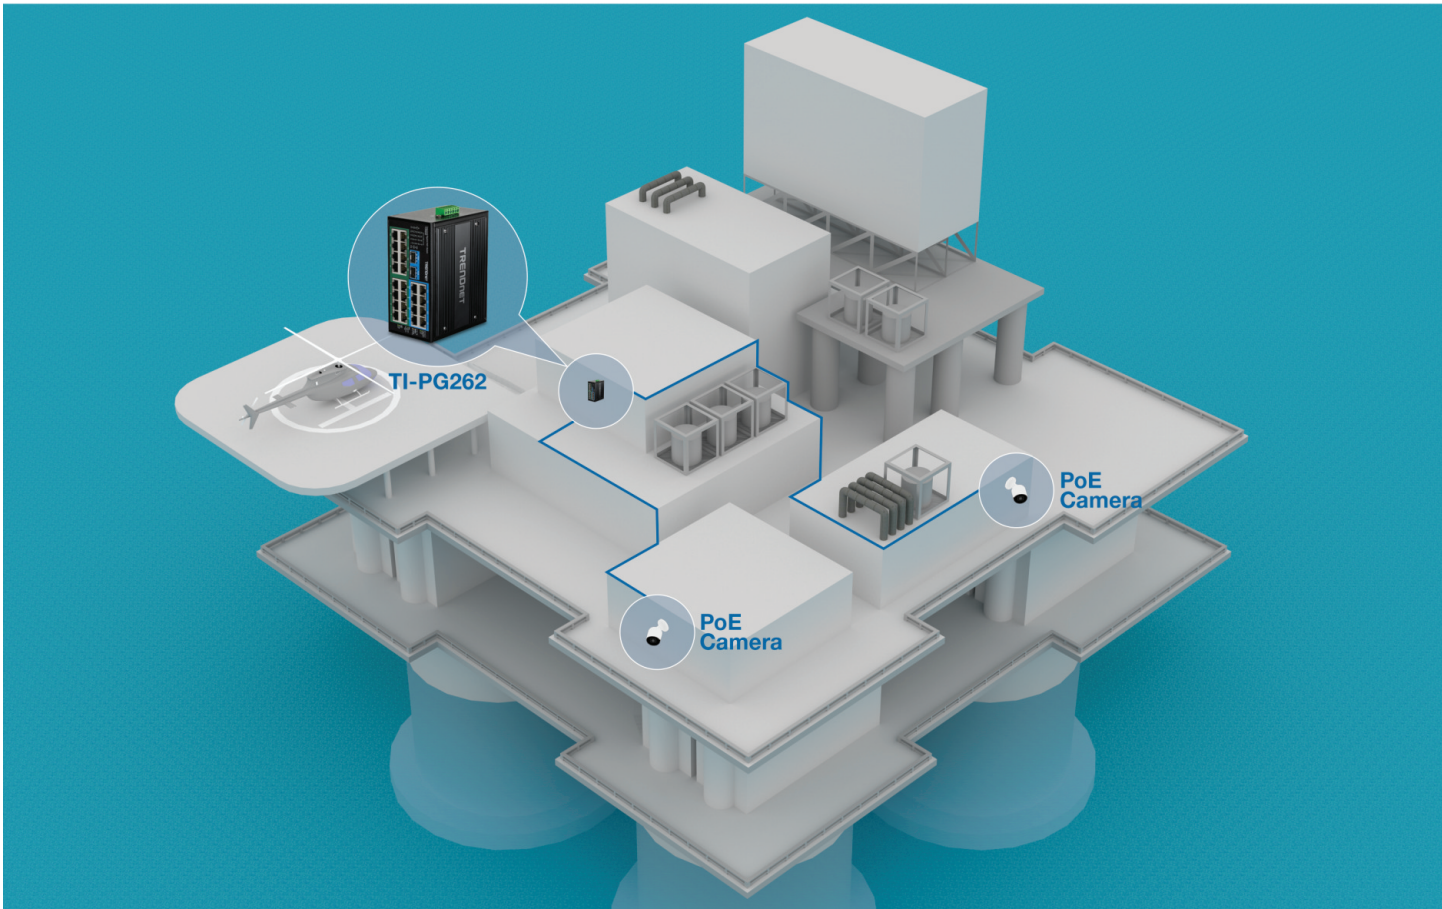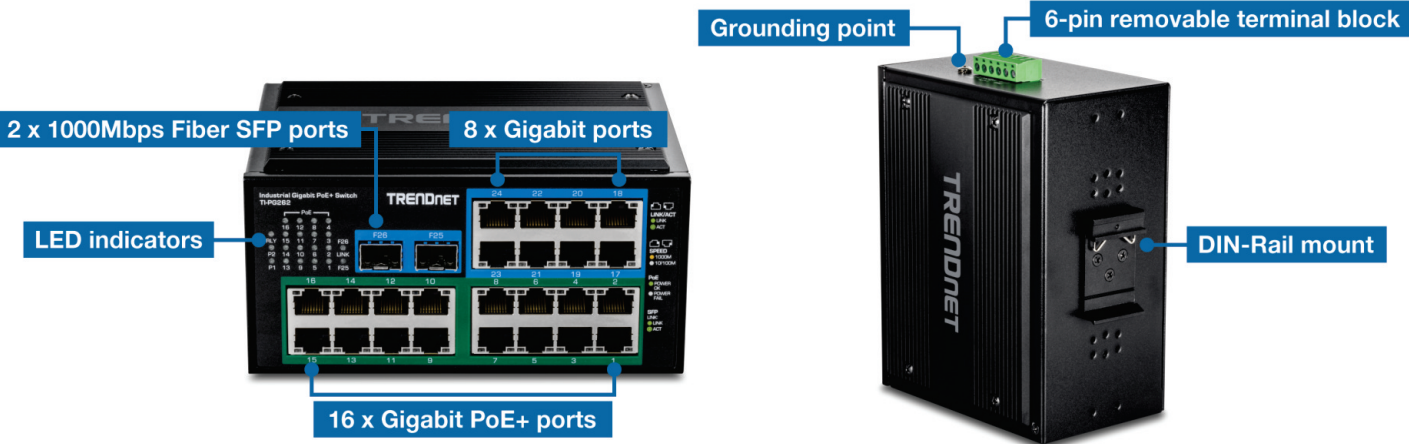

## SPECIFICATIONS

### Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.3z
- IEEE 802.3x
- IEEE 802.3af
- IEEE 802.3at

### Device Interface

- 16 x Gigabit PoE+ ports
- 8 x Gigabit ports
- 2 x 1000Mbps Fiber SFP ports
- 6-pin removable terminal block
- LED indicators
- DIN-Rail mount
- Wall mount
- Grounding point

### Data Transfer Rate

- Ethernet: 10Mbps (half duplex), 20Mbps (full duplex)
- Fast Ethernet: 100Mbps (half duplex), 200Mbps (full duplex)
- Gigabit: 2000Mbps (full duplex)
- Fiber: 2000Mbps (full duplex)

### Performance

- Data RAM Buffer: 4.1Mbits
- Switching Fabric: 52Gbps
- MAC Address Table: 8K entries
- Jumbo Frame: 9KB
- Forwarding Rate: 38.6Mpps (64-byte packet size)

### Special Features

- Hardened components rated for extreme temperatures
- Dual power inputs
- Auto negotiation
- Auto store and forward architecture
- Automatic address learning and address aging
- ESD 8KV and Surge 2KV protection

### Power

- Input: 48 - 56V DC
- Compatible power supply: TI-S48048 (sold separately)
- Max. consumption: 5.76W @48D VC

### PoE

- 802.3at: Up to 30W per port
- PoE budget: 480W @56V DC
- PoE Mode A: Pins 1, 2, 3, and 6 for power

### Terminal Block

- Redundant power inputs, alarm relay contact, 6 pin
- Wire range: 0.34mm<sup>2</sup> to 2.5mm<sup>2</sup>
- Solid wire (AWG): 12-24/14-22
- Stranded wire (AWG): 12-24/14-22
- Torque: 5 lb. – In / 0.5Nm / 0.56 Nm
- Wire strip length: 7-8mm

### Alarm Relay Contact

- Relay outputs with current carrying capacity of 1A, 24V DC
- Short circuit mode when two power sources are connected
- Open circuit mode when only one power source is connected

### MTBF

- 503,149 hours

### Housing

- IP30 metal case
- DIN-Rail mount
- Wall mount
- Grounding point
- 8KV ESD protection
- 2KV surge protection

### Operating Temperature

- - 40° – 75° C (-40° – 167° F)

### Operating Humidity

- Max. 95 % non-condensing

### Dimensions

- 155 x 120 x 78mm (6.1 x 4.7 x 3 in.)

### Weight

- 0.9kg (2 lb)

### Certifications

- CE
- FCC
- LVD
- IEC 61000-4-2
- IEC 61000-4-4
- IEC 61000-4-5
- Shock (IEC 60068-2-27)
- Freefall (IEC 60068-2-32)
- Vibration (IEC 60068-2-6)

### Warranty

- Lifetime

### Package Contents

- TI-PG262
- Quick Installation Guide
- Removable terminal block
- DIN-Rail / wall mount kit

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

TRENDnet offers a lifetime warranty for all of its metal-enclosed network switches that have been purchased in the United States/Canada on or after 1/1/2015. Cooling fan and internal power supply carry a one-year warranty.