



PIN OUT

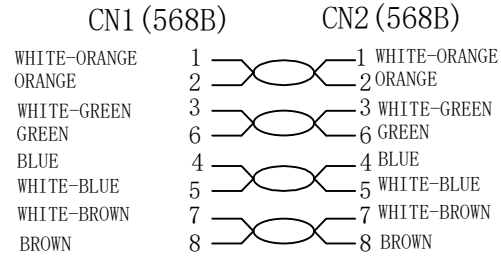

NOTE:

- ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
- FLUKE Channel TEST:
TEST LIMIT:ISO11801 Channel Class Ea
- Working temperature:-10°C~+60°C
Storage temperature:-20°C~+75°C
- RoHS2.0 AND REACH compliant
- Spray WORD:CAT6A U/UTP 4x2x32AWG/7 Ultraflex LSZH-TPE ISO11801 & EN50173 & ANSI/TIA568C.2
- Minimum of the bending radius is 15mm(Suitable for all meters)



MATERIAL LIST

③	OVER MOLD	75A PVC GREY(RAL7035)	2	
②	CONNECTOR	RJ45 8P8C UNSHIELDED PLUG, PIN GOLD PLATED 3U", COLOUR:TRANSPARENT	2	
①	CABLE	CAT.6A U/UTP CABLE (32AWG BC*1P)*4P JACKET:ULTRAFLEX LSZH-TPE GREY (RAL7035) OD:3.4±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

Item NO.	Length (mm)
21.44.3900	150±10
21.44.3901	300±10
21.44.3902	500±20
21.44.3903	1000±20
21.44.3904	1500±30
21.44.3905	2000±30
21.44.3906	3000±50
21.44.3907	5000±100

DESC.	ROLINE GREEN Cat.6A U/UTP Patch cord 10G Slim Type Ultraflex LSZH-TPE, grey
-------	---

		NEW	2022-07-01	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

SECOMP