


CONDUCTOR
INSULATION
BRAID
AL-FOIL
JACKET

WIRING DIAGRAM

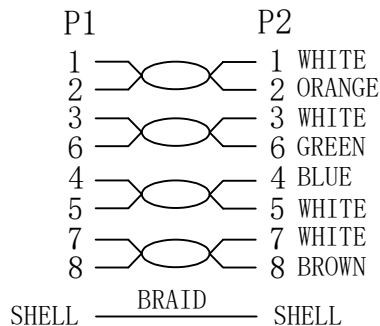

NOTE:

- ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
- FLUKE Channel LINK TEST:TEST LIMIT:ISO11801 Channel Class EA
- Working temperature:-40℃~+60℃
- Storage temperature:-40℃~+75℃
- Operation humidity:10%~85%
- Storage humidity:10%~85%
- RoHS2.0 AND REACH compliant
- SPRAY WORD:CAT.6A S/FTP TPE 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568.2-D
- Halogen-free (IEC60754-2)
- Low smoke(IEC 61034)
- Flame retardant (IEC60332-1-2)

Attention: Not suitable for underground installation; RJ-45 connections must be protected from the weather.

Color:Black 3C	
ITEM NO.	LENGTH
21.99.0720	20000±300mm
21.99.0721	30000±400mm
21.99.0722	50000±400mm

MATERIAL LIST

③	OVER MOLD	75A PVC	2	
②	CONNECTOR	RJ45 8P8C shielded Plug, Pin Gold Plated 3u", Transparent BLUE	2	
①	CABLE	S/FTP CAT. 6A (1/26AWGBC*1P+AL-FOIL)*4PAIRS+ JACKET:TPE OD:6.2±0.2mm	1	

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		Change the Working and Storage temperature		2024-08-29 A1
		NEW		2023-02-01 A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

DESC.	VALUE Outdoor S/FTP PatchCord Cat.6A/Class EA, Solid
-------	--

