


WIRING DIAGRAM(568B)

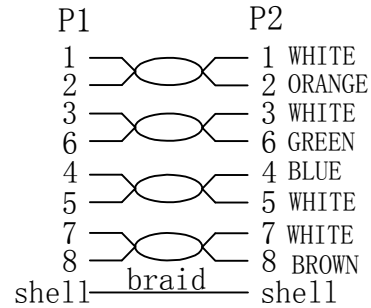

NOTE:

1. ELECTRICAL TEST:

- (1). 100% OPEN SHORT, MISS WIRE TEST
- (2). INSULATION RESISTANCE:DC 300V 10MΩ ;
- (3). CONDUCTOR RESISTANCE:3Ω Max (More than 3m, add one ohm per meter) ;

2. Fluke channel link test:

TEST LIMIT:ISO11801 Channel Class Ea

3. PRINT WORD:

CAT6A S/FTP 4x2x27AWG/7 LSZH ISO11801 & EN50173 & ANSI/TIA568C.2

4. ROHS2.0 & REACH COMPLIANT

5. Minimum of the bending radius is 50mm

(Suitable for all meters)

MATERIAL LIST

③	OVER MOLD	PVC 75A GREEN(PANTONE 3278C)	2	
②	CONNECTOR	RJ45 8P8C Shielded Plug, Pin Gold Plated 3u", Shell Nickel Plating ,Transparence blue	2	
①	CABLE	S/FTP CAT. 6A 27AWG (Bare Copper*1P+AL-FOIL)*4PAIRS+BRAID (AL-MG) COLOUR:GREEN/3278C JACKET:LSZH OD:6.0±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW		2018-11-21 A
BY	CHK	REVISION RECORD MODIFICATION		DATE REV.

COLOUR:GREEN (PANTONE 3278C)		
ITEM NO.	LENGTH	TOLERANCE
21. 99. 1944	0. 3m	±10mm
21. 99. 1940	0. 5m	±15mm
21. 99. 1941	1m	±30mm
21. 99. 1993	1. 5m	±45mm
21. 99. 1942	2m	±60mm
21. 99. 1943	3m	±90mm
21. 99. 1945	5m	±150mm
21. 99. 1946	7m	±210mm
21. 99. 1947	10m	±300mm
21. 99. 1948	15m	±450mm
21. 99. 1949	20m	±600mm

ITEM NO.	21. 99. 1944	21. 99. 1940	21. 99. 1941	21. 99. 1993	21. 99. 1942
	21. 99. 1943	21. 99. 1945	21. 99. 1946	21. 99. 1947	21. 99. 1948
	21. 99. 1949				
DESC.	VALUE S/FTP CAT. 6a Patch Cord, green				

SECOMP