
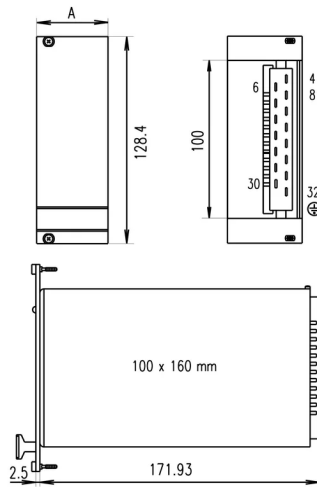


13100-174 PSU 19" AC/DC MAXPOWER 50 W, SINGLE, MAX 148



KEY FEATURES

Wide input voltage range 90 ... 253 VAC and 100 ... 360 VDC

1 output voltage

Signalling: Output voltage OK

Including front panel

Standby (no load) Power <1.5 W

Efficiency up to 88%

PRODUCT ATTRIBUTES

Product Type: Power Supply

Type: 19" Switched-Mode

Input Voltage AC: 90 – 264 V

Power: 53 W

Number of Output Voltages: 1

Voltage 1: 48 V

Current 1: 1.1 A

Rack Height: 3 U

Rack Width: 6 HP

ADDITIONAL PRODUCT DETAILS

Redundancy with active OR decoupling; No base load required; Automatic load distribution depending on PSU temperature; No current share line required between power supplies; Quasi-resonant topology reduces EMC emissions.

Output data-at-Ta=-25...-50°C.

CERTIFICATIONS



North America

All locations
+1.763.422.2661
Chat with us:
schroff.nvent.com

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
schroff.nvent.com

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
schroff.nvent.com



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.