


20860-645 MULTIPACPRO 19" CHASSIS, ALUMINUM, FOR EUROCARDS ASSEMBLY, 2 U, 280 MM

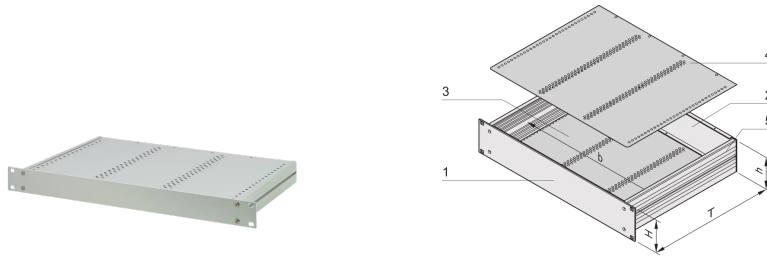

KEY FEATURES

Aluminum construction

Detachable front and rear panel for easy machining

IP 20, in accordance with IEC 60529

Supplied as space-saving flat-pack

Modifications such as cutouts, different finishes or dimensions available

Internal and external dimensions in accordance with: IEC 60297-3-100, -105

EMC shielding: Approx. 20dB(A) at 2 GHz without shielding material. >40dB(A) at 1 GHz with addition of stainless steel gasket between front panel and case body

Cover and base plate drilled with holes for horizontal mounting of euroboards

PRODUCT ATTRIBUTES

Product Type: Subrack/Chassis

Product Family: MultipacPRO

Type: Solid

Rack Height: 2 U

Depth: 280 mm

Usable Width: 403 mm

EMC Shielding: No (Retrofittable)

Mounting: Rack

ADDITIONAL PRODUCT DETAILS

This 19" chassis is a form of subrack which accepts horizontal board mounting or the mounting of non-standard components like transformers or other heavy load accessories typically mounted on a chassis plate. This version are prepared for horizontal PCB board assembly.

Please order front handles separately.

CERTIFICATIONS



North America

All locations
+1.763.422.2661
Chat with us:
schroff.nvent.com

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
schroff.nvent.com

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
schroff.nvent.com

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
schroff.nvent.com



Our powerful portfolio of brands:
nVent.com **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**