


## 23001-068 VMEBUS J1/J2 BACKPLANE, 6 U, 8 SLOTS

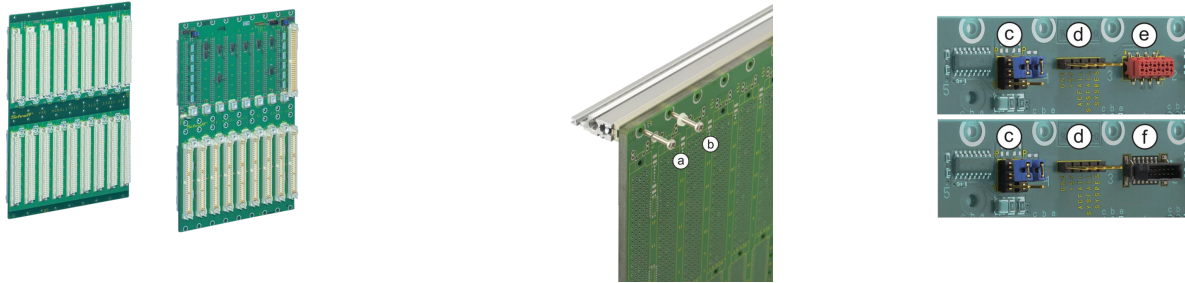

### KEY FEATURES

In accordance with ANSI/VITA 1-1994 VME64 standard

Monolithic backplane, 6 U with J1 and J2 plane

Connection or isolation between the digital GND and chassis GND can be changed via screw

Termination active/passive, switchable via jumpers; passive termination preset

Electronic automatic daisy chain (EDC)

Supply voltages provided via power bugs (ring tag M4) or FASTON

### PRODUCT ATTRIBUTES

Product Type: Backplane

Number of Slots: 8

Rack Height: 6 U

Backplane Type: VMEbus, J1/J2, with EDC

System Slot: Slot 1 Left

Slot Width: 4 HP

Connector Type: DIN 41612, C96

Power Connector Type: Power Bugs for M4 Cable Lugs

Utility Connector Type: MicroMatch, 8-pin, 5-pin Header

Height: 263.4 mm

Width: 161.1 mm

## ADDITIONAL PRODUCT DETAILS

---

The nVent SCHROFF VMEbus Backplanes have outstanding high-frequency noise suppression and very high MTBF values due to ceramic capacitors and SMD fabrication technology.

Other configurations available on request.

## CERTIFICATIONS

---



### North America

All locations  
+1.763.422.2661  
Chat with us:  
[schroff.nvent.com](https://schroff.nvent.com)

### Europe

Straubenhardt, Germany  
+49.7082.794.0  
Betschdorf, France  
+33.3.88.90.64.90  
Warsaw, Poland  
+48.22.209.98.35  
Assago, Italy  
+39.02.932.7141  
Chat with us:  
[schroff.nvent.com](https://schroff.nvent.com)

### Asia

Shanghai, China  
+86.21.2412.6943  
Qingdao, China  
+86.532.8771.6101  
Singapore  
+65.6768.5800  
Shin-Yokohama, Japan  
+81.45.476.0271  
Chat with us:  
[schroff.nvent.com](https://schroff.nvent.com)

### Middle East & India

Dubai, United Arab Emirates  
+971.4.378.1700  
Bangalore, India  
+91.80.6715.2001  
Istanbul, Turkey  
+90.216.250.7374  
Chat with us:  
[schroff.nvent.com](https://schroff.nvent.com)



Our powerful portfolio of brands:  
[nVent.com](https://nVent.com) **CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**

© 2023 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners.

nVent reserves the right to change specifications without notice.